

# INON

## INON XD Mount for URX100A

Thank you for purchasing INON product.

The INON XD Mount for URX100A is exclusively designed for SONY underwater housing MPK-URX100A (for RX100 series) to attach INON XD mount series lens.

**\* The "diffuser" supplied with the housing cannot be attached when this product is installed. Remove it or use the "External flash adapter" included in the housing.**

- Package contents** :
- XD Mount for URX100A ①
  - Retainer M67 ②
  - XD Mount Tool M52/M67 ③
  - Front Cap ④



- Compatibility** : **Compatible camera/housing**  
(As of October 2021)
- SONY MPK-URX100A (for RX100 series)


**Compatible lens**

- INON UWL-95S XD wide conversion lens
- INON UCL-165 XD underwater close-up lens
- INON UCL-67 XD, UCL-90 XD underwater close-up lens
- INON UFL-M150 ZM80 underwater micro fish-eye lens (\*1)
- INON UCL-165 M67/UCL-330 close-up lens (\*2)




(\* 1) Optional *M27-XD Mount Converter for UFL-M150 ZM80* is required.

(\* 2) Optional *M67-XD Mount Converter* is required.

- Preparation** :
- Component items are assembled as shown in the right image. Press the lock lever and twist the front cap counterclockwise to separate. You will find the Retainer M67 inside.

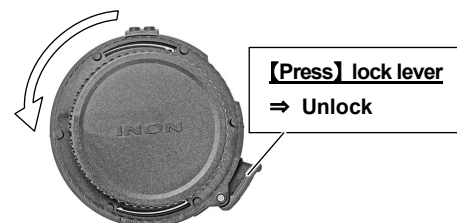

- Installation** :
- Put the **hook** of the XD Mount in the **notch** of the housing lens port (A).
  - Place the **Retainer M67** inside of the XD Mount without moving the XD Mount. Turn the **Retainer M67** clockwise to screw in the housing lens port (B).
  - Put the outer edge of the **XD Mount Tool M52/M67** into notches of the **Retainer M67** and slowly tighten (C).

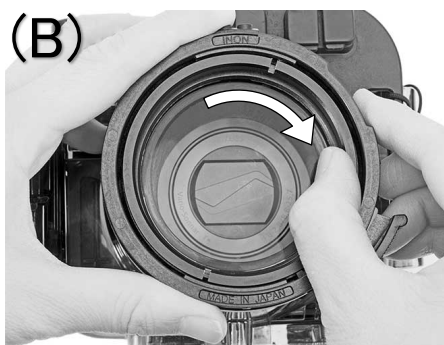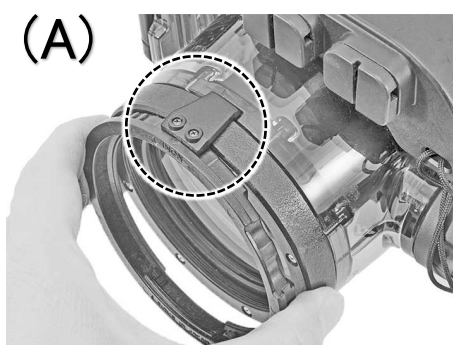

- ⚠ Make sure to place the **Retainer M67** flat to prevent cross-threading. After completely tightening, confirm that the **Retainer M67** has been fastened securely without rattle.
- ⚠ If the **Retainer M67** contacts the lock lever, tighten the **Retainer M67** with keep pressing the lever.
- ⚠ Make sure not to drop the tool to prevent damage of the lens port surface.

- Installing lens** :
- Refer to respective user manual.
  - Put the front cap on when not using an attachment lens to protect lens port surface.



- Maintenance** :
- After use, rinse with fresh water to remove salt and other stains, and place in a well-ventilated area out of direct sunlight to dry thoroughly. **DO NOT** expose directly to fire or heat as this may cause deformation or damage.
  - **DO NOT** use organic solvents such as alcohol, benzene, thinner, or oils/chemicals such as rust inhibitors, lubricants, glazing agents, or detergents (especially alkaline detergents) when cleaning the product. Some of the components of this product may change when exposed to the above substances, such as melting or becoming brittle.
  - If **the** product is not used for more than a week, please remove and store it. Storing the product being attached on the combined product for extended period may cause deformation/damage due to continuous force applied to the combined product.

- Before installing:**
- **DO NOT** inquire of GoPro, Inc. installation of this product as it is not under the control of GoPro, Inc. The user must take full responsibility for the installation/use of this product
  - INON Inc. shall not be liable for any failure of the housing, housing accessory or camera due to installation/use of this product.
  - INON Inc. shall not be liable in any way for any incidental damages (such as expenses incurred in taking pictures/footages or loss of profit that should have been gained by the pictures/footages) that may result from flooding or other problems caused by the installation/use of this product
  - **Installation and use of this product shall be deemed as full consent of the user to the above conditions.**

INON Inc.

2-18-9, Dai, Kamakura  
Kanagawa 247-0061

E-mail [support@inon.co.jp](mailto:support@inon.co.jp)

Fax. +81(0)467-48-2178

URL <http://www.inon.jp/>

September 2023