

# INON

## INON Focus Gear EFS35STM

Thank you for purchasing INON product.


- Package contents** :
- Focus Gear EFS35STM ×1
  - Spare O-ring snip ×4
  - This user manual ×1

- Compatible lens (as of Sep. 2018)** :
- Canon EF-S35mm F2.8 Macro IS STM (\*1)
- (\*1) Preinstalled lens hood on the lens has to be removed.


- Compatible port/ Ext. Ring (as of Sep. 2018)** :
- INON Ext. Ring 18 + INON Pancake Port (\*2)
- (\*2) A close-up lens is not compatible as minimum focus distance of the camera lens is too close though the port edge has M67 screw mount to add an attachment lens.

- Compatible housing (as of Sep. 2018)** :
- INON X-2 for EOS20D, X-2 for EOS20D BK, X-2 for EOS20D BK(TM), X-2 for EOS30D BK(TM), X-2 for EOS50D/40D, X-2 for EOS60D, X-2 for EOS70D, X-2 for EOS80D

- Installation method** :
- Set focus mode switch of the lens to 「MF」 or 「AF」 position.
  - Make sure that 4 x O-ring snips are put in the inner groove with 90 degree spacing each other.



- Put the Focus Gear EFS35STM on the lens barrel from front side until the edge of this product contacts with the edge of the lens barrel. The pre-installed O-ring snip(s) may be caught on the focus ring and came off during the installation. If this happens remove the gear first and reinstall separated O-ring snip(s) in a groove inside of the gear.
- Check that there is 8mm gap between the bottom surface of the Focus Gear and the lens mount surface, and both surfaces must be parallel.

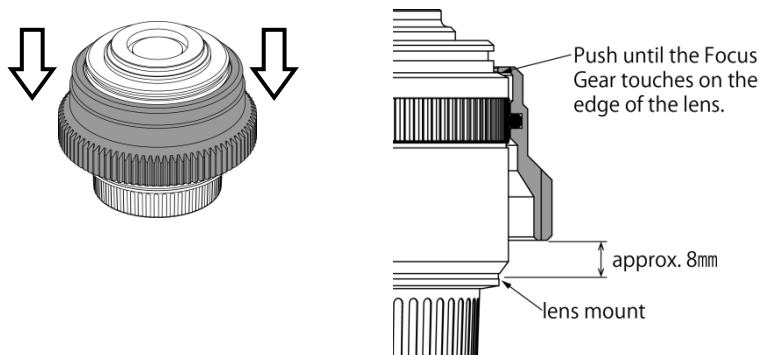

- Turn the focus gear to make sure that it operates without problem. If you feel any toughness when turning, pre-installed O-ring snip(s) may be not in position. If this case, remove the Focus Gear and start over. The Focus Gear EFS35STM is fixed on the lens barrel by pressure molding of pre-installed O-ring snips on inner side of the Focus Gear. You may have difficulty to install the Focus Gear due to individual variety of space between the gear and the lens. In this case, take out and cut off O-ring snip(s) little by little to adjust pressure of O-ring snip(s). DO NOT cut off O-ring snips(s) too much or you cannot fix the Focus Gear tight enough.

**Handling precautions:**

- Please note that lens manufacture has no concern with installation of this product on lens. Do not inquire lens manufacture about the installation. Also please note that you have to take full responsibility for the installation.
- INON Inc. cannot take any responsibility for any trouble/damage (damage to lens/lens accessories/camera) resulting from the installation.
- Should you have trouble like flooding caused by the installation, INON Inc. can not take any responsibility for incidental damage (relevant expense to take a shot etc.)
- **Please perform the installation only if you can accept above conditions.**

INON Inc. 2-18-9, Dai, Kamakura, Kanagawa 247-0061  
E-mail support@inon.co.jp / Fax. +81(0)467-48-2178  
URL <http://www.inon.jp/>

September 2018