


# INON X-2 for GF2 HOUSING SYSTEM CHART

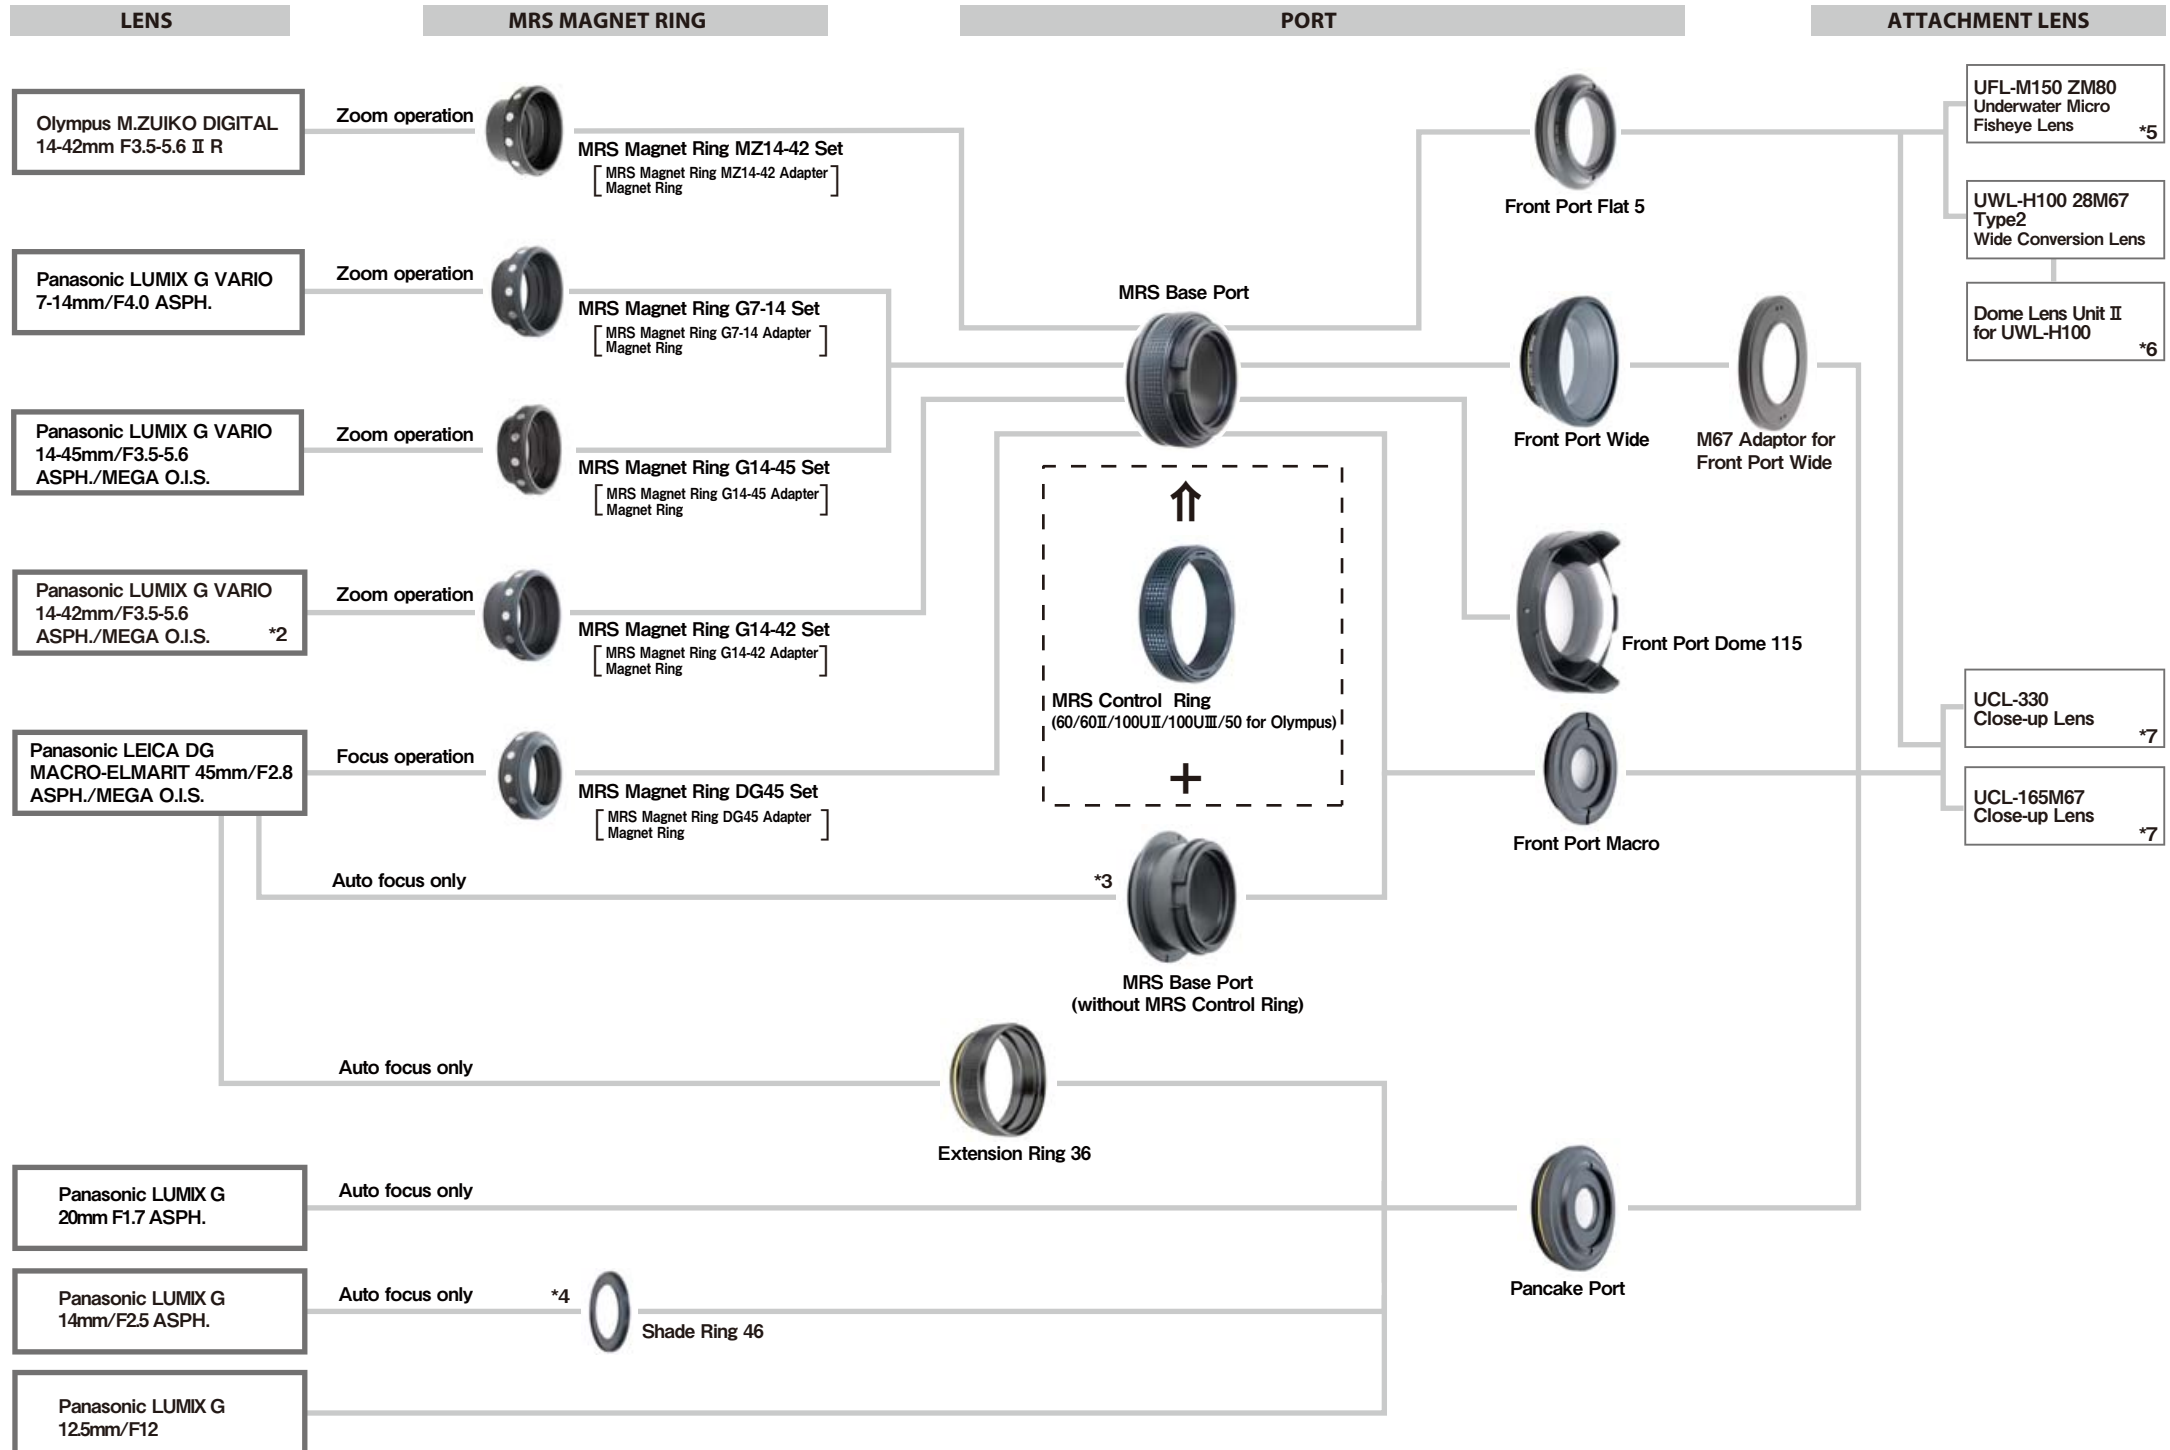


**LENS**

**MRS MAGNET RING**

**PORT**

**ATTACHMENT LENS**

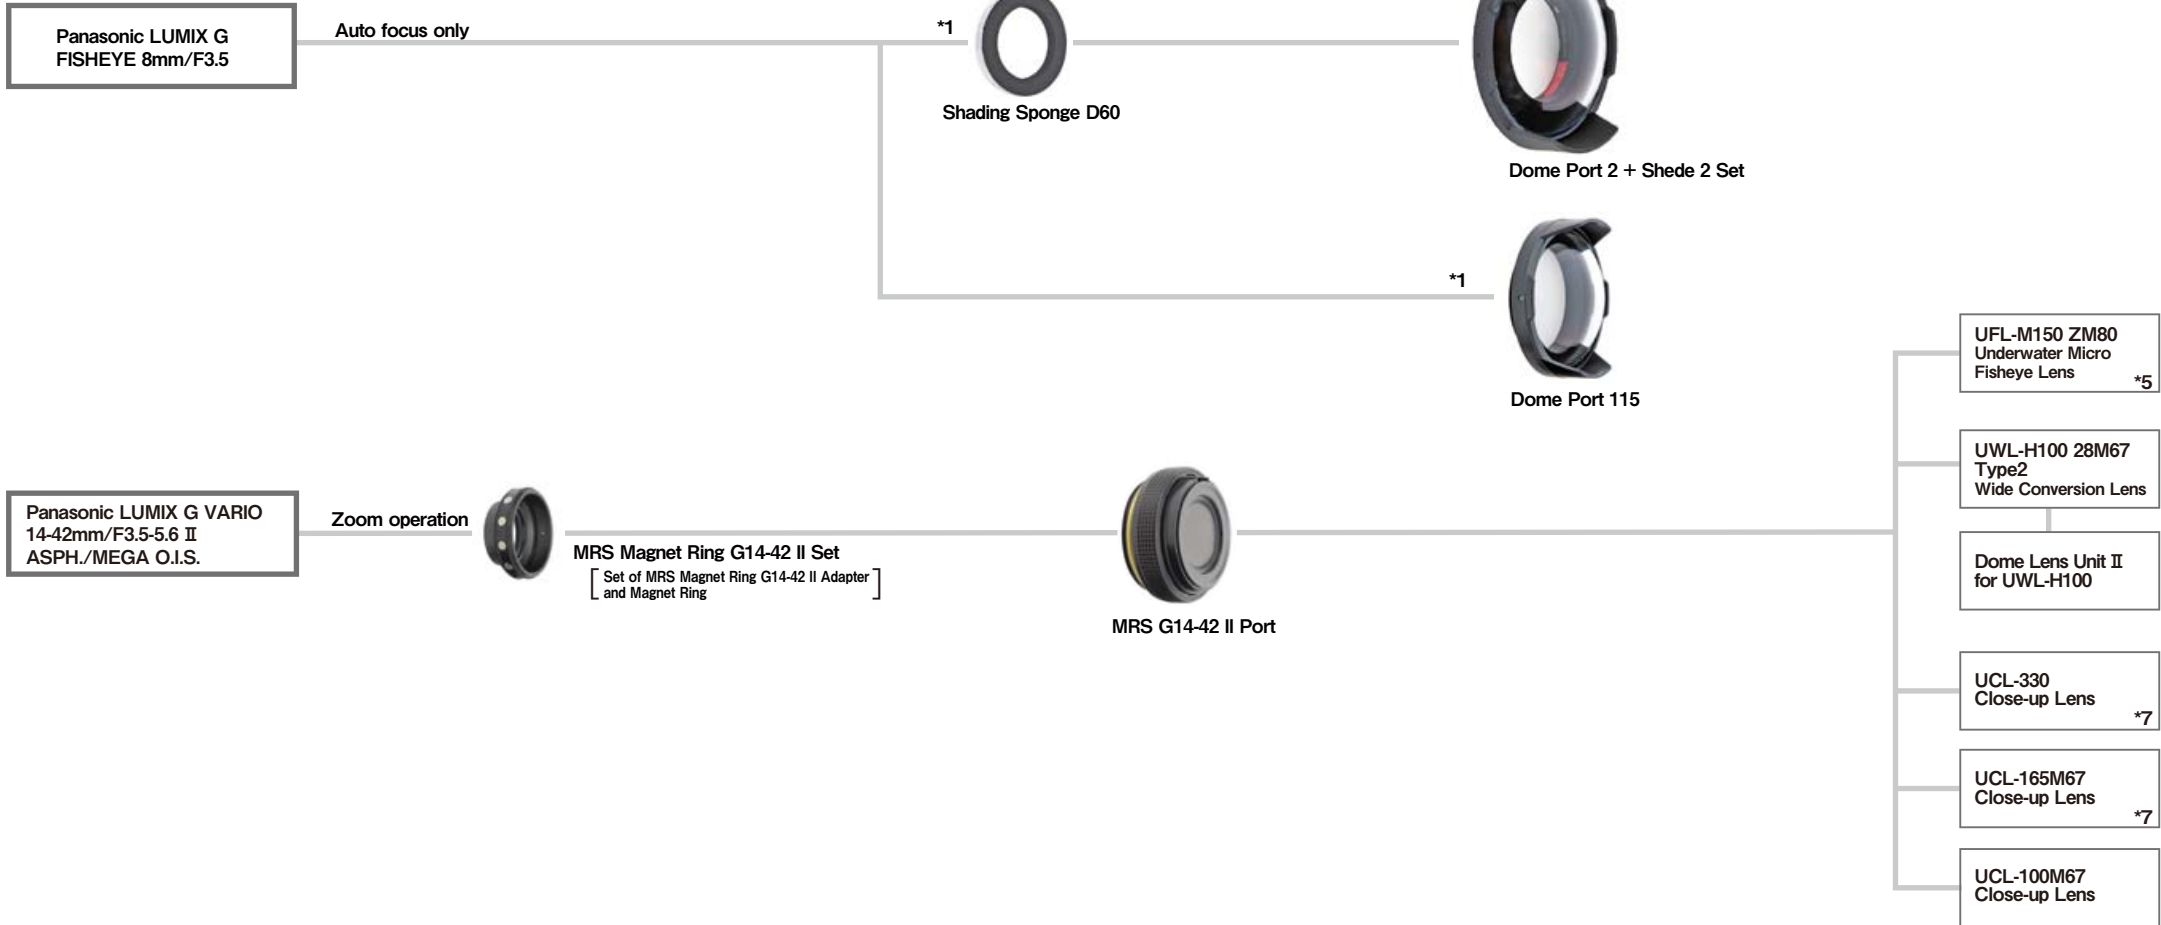

\*1 "Shade Sponge D60 is attached on inner side of the Dome Port II to block built-in flash light to prevent the flash light from exposing on an image.

\*2 When shooting with wider aperture setting, image quality may degrade on peripheral part.

\*3 Upgradable to [MRS Base Port.] with optional [MRS Control Ring (60/60II/100UII/100UIII/50 for Olympus)].

\*4 The Shade Ring 46 is attached in front of the compatible lens to prevent built-in flash light from exposing on an image.

\*5 Optional [M27-M67 Mount Converter for UFL-M150 ZM80.] is necessary.

\*6 There is vignetting at wide end even underwater. Crop an image after shooting or zoom to telephoto side until no vignetting is observed.

\*7 Significant vignetting on image corners on land and underwater at zoom range from wide end to middle. Zoom to telephoto side to eliminate vignetting.

